

TECHNICAL SPECIFICATION:

Type	Skimmer
Material	AISI 316L stainless steel 1.4404 (X2CrNiMol 7-1-2-2)
Wall	Thickness 2,5 mm Brushed K400
Bottom	Thickness 2 mm Anti-slip surface
Options	Hydro massage jets RGB lighting Air therapy Counter current

THE PRICE INCLUDES:

- Floating stainless steel skimmer
- Main drain chanel
- Bottom suction
- 2 wall-mounted suction baskets
- Piping from skimmer and nozzles
- Insulation: 30 + 20 mm XPS walls, 100 mm XPS floor

TECHNICAL SPECIFICATION:


Type	Skimmer
Material	Polypropylene
Wall	Thickness 10 mm
Bottom	Thickness 8 mm Step surface thickness 20 mm
Options	Hydro massage jets RGB lighting Counter current

THE PRICE INCLUDES:

- 2 floating stainless steel skimmers
- 2 inlet nozzles in the color of the minipool
- Piping from skimmer and nozzles
- Insulation: insulating foam 4 cm
- Colours: white / grey / anthracite



COMPACT ELEGANCE, YOUR MINI OASIS OF RELAXATION

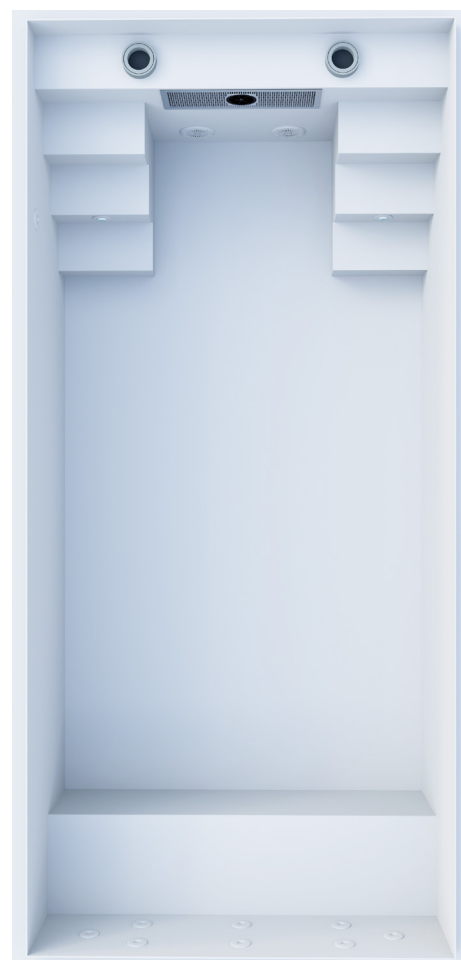


SWIM & FUN Inox 1

Inner size:
2,4 x 5,25 x 1,2 m

Water volume:

Weight:
1240 kg

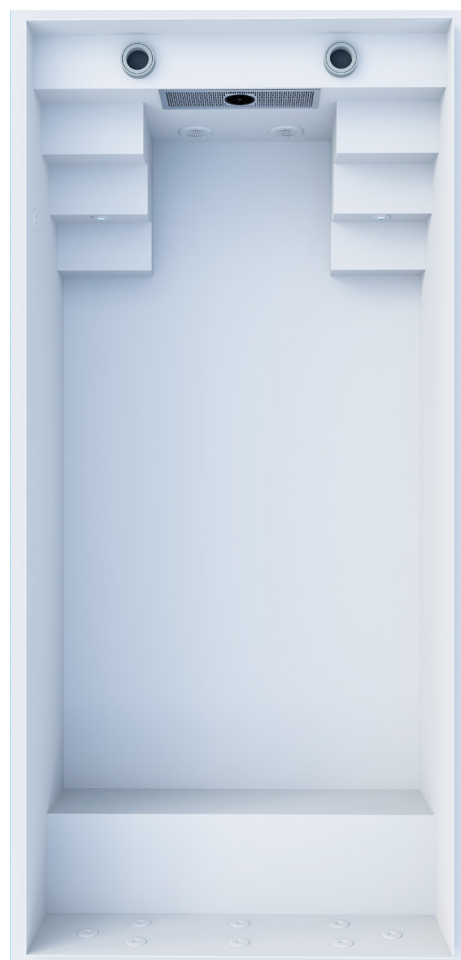

SWIM & FUN PP 1

Inner size:
2,4 x 5,25 x 1,2 m

Water volume:

Weight:
450 kg

BENEFITS

- + Luxury & design in limited spaces
- + Tailored features for personal touch
- + Enjoyable space for family & friends
- + Private stress relief oasis
- + Therapeutic hydrotherapy benefits
- + Eco-friendly & costs saving operation
- + Ideal for compact gardens, terraces & roofs

INVITATION

Join us at Diamant Unipool's factory for an exclusive Minipools presentation in January and February 2024. Don't miss the chance to explore our latest innovations firsthand! Contact our sales manager for more info.



Diamant Unipool, s. r. o., Bynina 186, 757 01 Valasske Mezirici, Czech Republic

www.diamant-unipool.eu



TECHNICAL SPECIFICATION:

Type	Skimmer
Material	AISI 316L stainless steel 1.4404 (X2CrNiMol 7-1-2-2)
Wall	Thickness 2,5 mm Brushed K400
Bottom	Thickness 2 mm Anti-slip surface
Options	Hydro massage jets RGB lighting Air therapy

THE PRICE INCLUDES:

Floating stainless steel skimmer
2 stainless steel inlet nozzles
2 wall-mounted suction baskets
Piping from skimmer and nozzles
Insulation: 50mm XPS walls, 20mm XPS floor

OPTIONAL EQUIPMENT:

Reinforced insulation
Massage system: 6/10 nozzles
Lighting: 2 pcs of LED lamps
Free-standing

TECHNICAL SPECIFICATION:

Type	Skimmer
Material	Polypropylene
Wall	Thickness 10 mm
Bottom	Thickness 8 mm Step surface thickness 20 mm
Options	Hydro massage jets RGB lighting

THE PRICE INCLUDES:

Floating skimmer
2 inlet nozzles in the color of the minipool
Piping from skimmer and nozzles
Insulation: insulating foam 4 cm
Colours: white / grey / anthracite

OPTIONAL EQUIPMENT:

Reinforced insulation
Massage system: 6/10 nozzles
Lighting: 2 pcs of LED lamps



PURE Inox 1

Inner size:
2,2 x 2,4 x 1,2 m

Water volume:
4150 l

Weight:
750 kg



PURE Inox 2

Inner size:
2,2 x 3,2 x 1,2 m

Water volume:
4500 l

Weight:
890 kg




PURE PP 1

Inner size:
2,2 x 2,4 x 1,2 m

Water volume:
3180 l

Weight:
350 kg

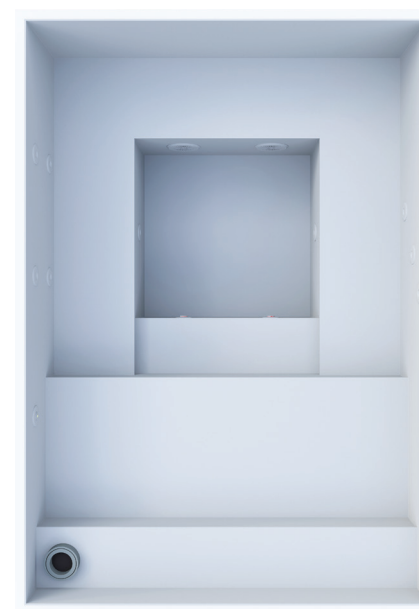

PURE PP 2

Inner size:
2,2 x 3,2 x 1,2 m

Water volume:
5 000 l

Weight:
390 kg




PURE Inox 3

Inner size:
2,2 x 4,0 x 1,2 m

Water volume:
7070 l

Weight:
1010 kg

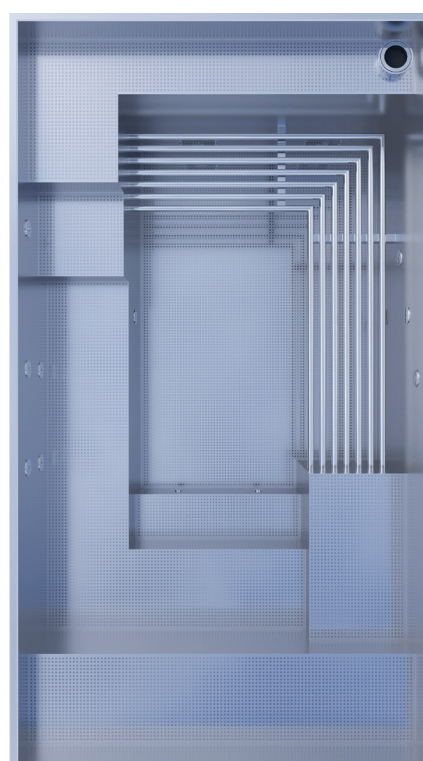

PURE Inox 4

Inner size:
2,2 x 4,0 x 1,2 m

Water volume:
6400 l

Weight:
1120 kg




PURE PP 3

Inner size:
2,2 x 4,0 x 1,2 m

Water volume:
5480 l

Weight:
500 kg

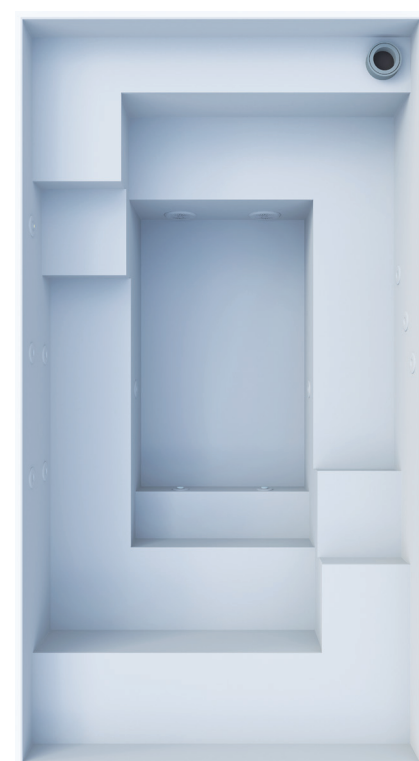

PURE PP 4

Inner size:
2,2 x 4,0 x 1,2 m

Water volume:
5210 l

Weight:
500 kg

* All prices are ex works, excluding VAT, transport, installation, and additional services. Prices are valid until December 2023.